

Track reconstruction with ACTS in ePIC detector


Wenqing Fan and YueShi Lai (with Beatrice Liang, Ernst Sichterman, Shujie Li)


ePIC GD/I meeting, 10/31/2022

- Symmetric tracking geometry + 1.7T field
 - B field is scaled up from BarBar field map (1.5T to 1.7T)
 - ePIC geometry material map added by Shujie Li
- Performance test: check if the current geometry + track reconstruction algorithm gives resonable performance
 - * Single pion events: uniform p, ϕ , η distribution (p range: 0 to 30GeV, η range: -3.5 to 3.5)
 - Track reconstruction with truth seeding

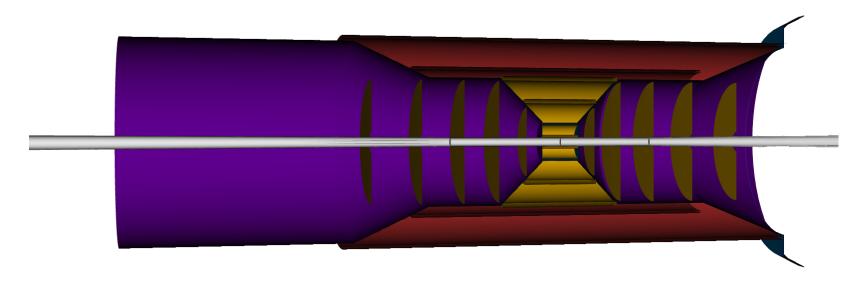

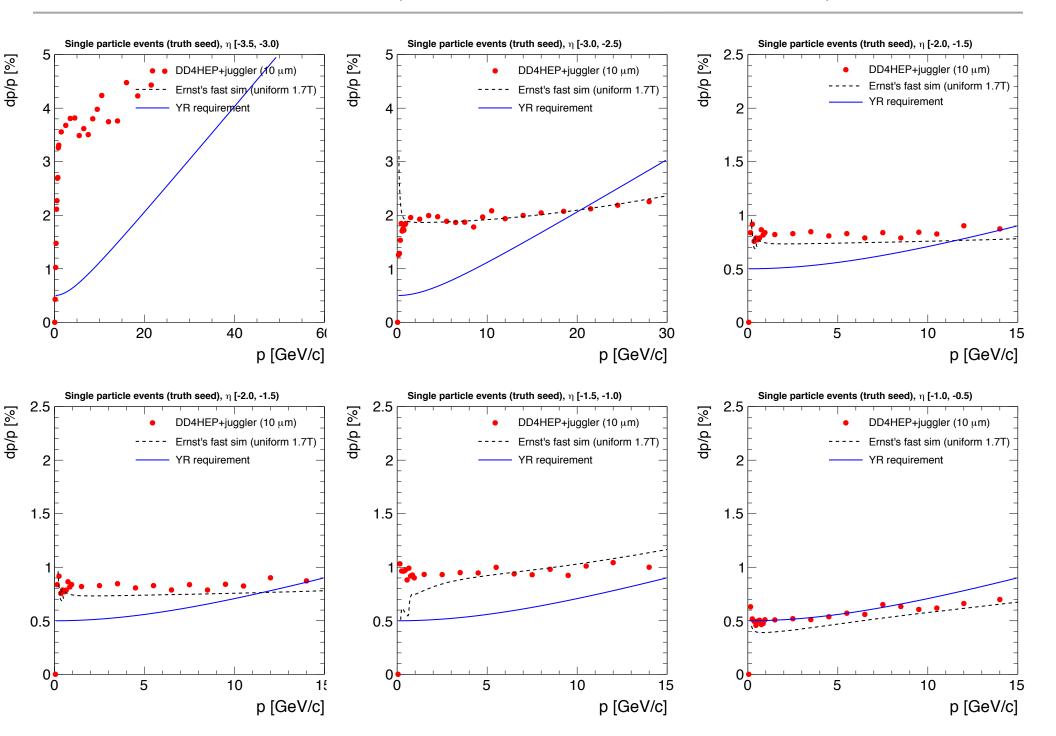

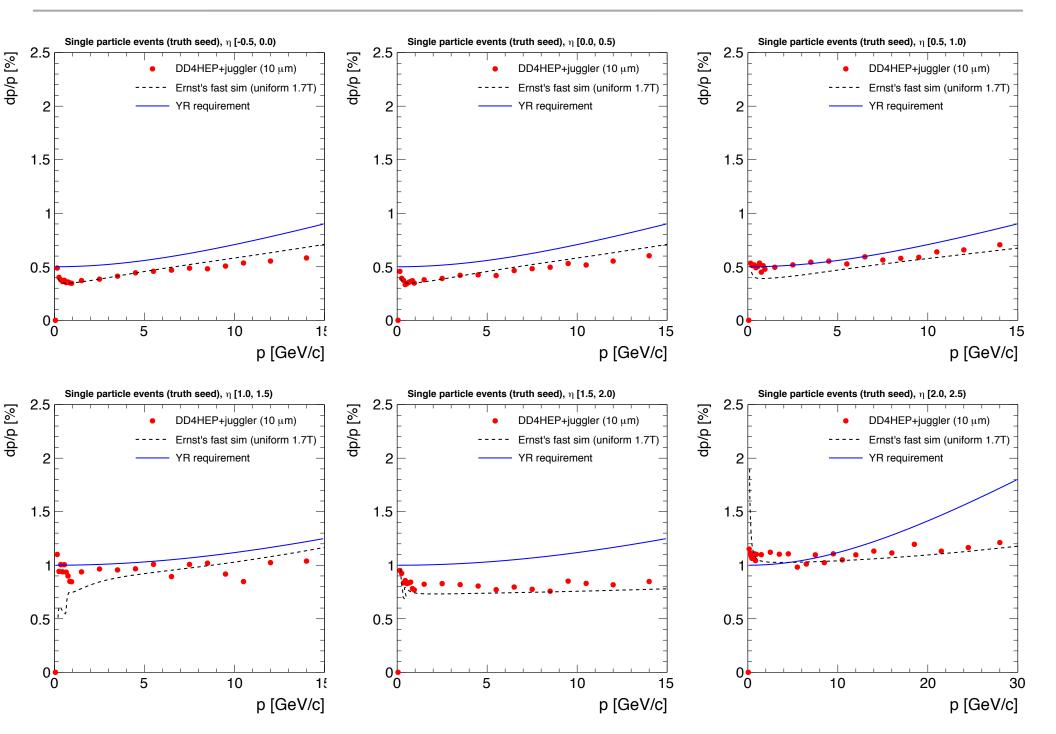


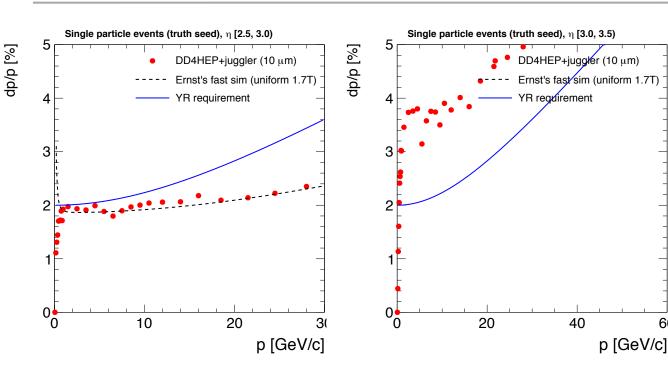


Results from DD4HEP in agreement with the fast simulation results

YR requirement achieved for most of the η range


- Comparison of different pixel sizes (10μm, 15μm, 18μm)
 - Intial study by Stephen Maple: https://indico.bnl.gov/event/17347
 - Sizable effect on the momentum resolustion (especially at higher p range)
 - Small effect on the pointing resolution: multiple scattering effect dominant (large and thick beam pipe)

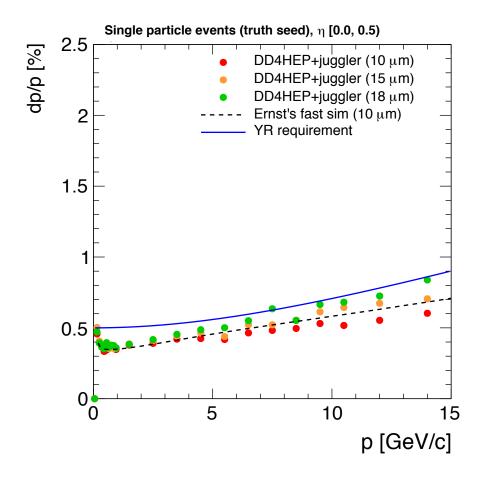

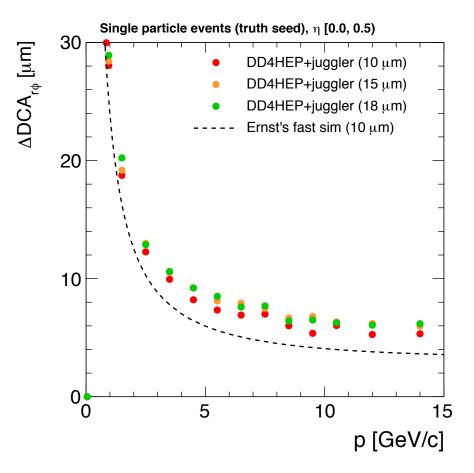


- Geomtry update because of the new tracking envolope
 - Only change the electron-going side disk array: outter most 3 disks moved inwards (more details in Ernst' talk: https://indico.bnl.gov/event/17348/)
- A new 1.7T field map is available now

Symmetric geometry

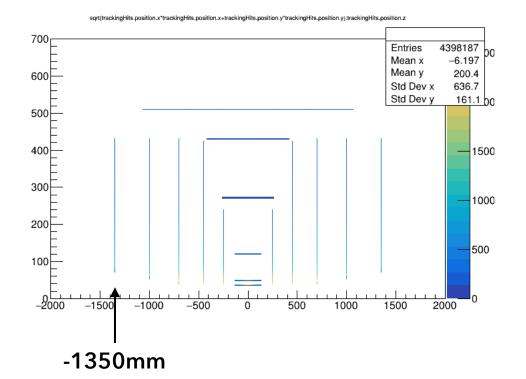

New geometry

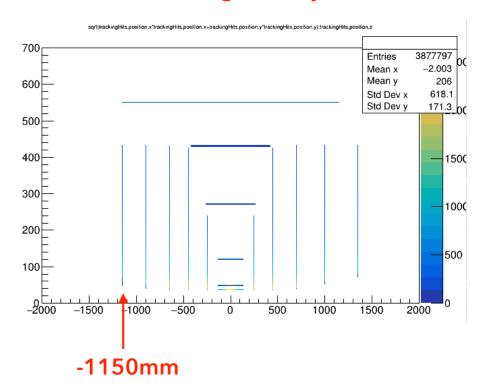


From Elke's talk: https://indico.bnl.gov/event/17081/

Backward Detector Integration

What we need to watch out for

- Do we have enough space for the detector, its readout and services
- Does a detector, i.e. its material, impact the performance of other ones

Overall integration model that we try to keep consistent with the geometry database

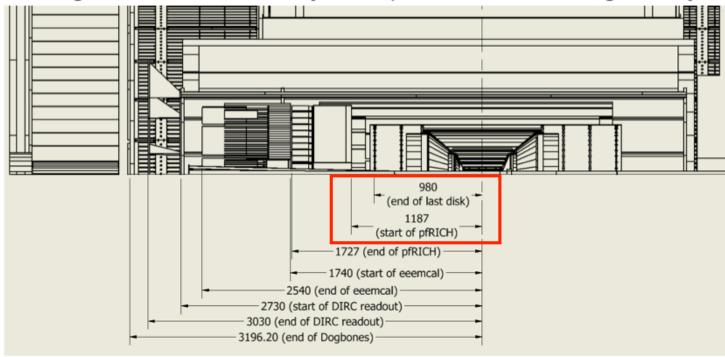

- Added one row of SciGl to move E³Cal as far back as possible and have good overlap
- moved pfRICH infront of E³Cal to maximize space for tracking → ~12cm less for tracking volume

if eToF mRICH moved 10 cm toward IP and tracking volume is reduced by 10 cm
if LAPPD readout → ToF integrated in pfRICH


From Elke's talk: https://indico.bnl.gov/event/17081/

Backward Detector Integration

What we need to watch out for

- Do we have enough space for the detector, its readout and services
- Does a detector, i.e. its material, impact the performance of other ones

Overall integration model that we try to keep consistent with the geometry database

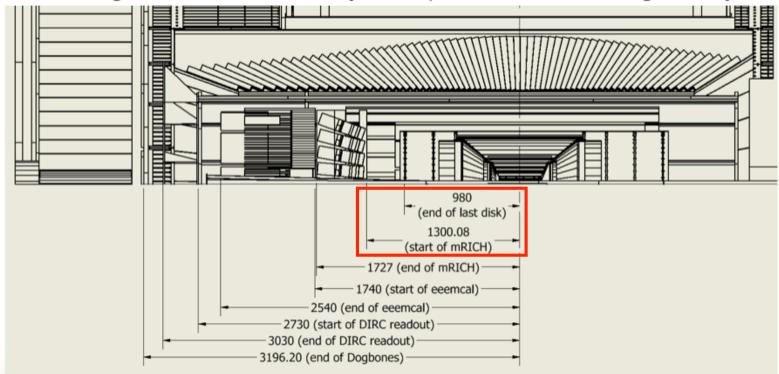


- Added one row of SciGl to move E³Cal as far back as possible and have good overlap
 moved mRICH infront of E³Cal to maximize space for tracking
 - if eToF mRICH moved 10 cm toward IP and tracking volume is reduced by 10 cm if LAPPD readout → ToF integrated in mRICH


- Geomtry update because of the new tracking envolope
 - Only change the electron-going side disk array: outter most 3 disks moved inwards (more details in Ernst' talk: https://indico.bnl.gov/event/17348/)
 - ~22% worse momentum resolution expected from the fast simulation study by Ernst

Consistent results from full simulation (although the full simulation shows a

bigger difference)


Figure credit: Ernst Sichterman

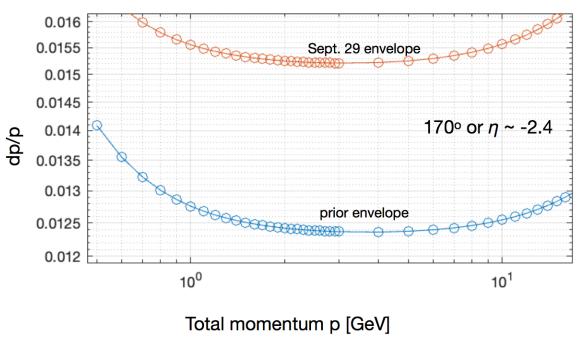

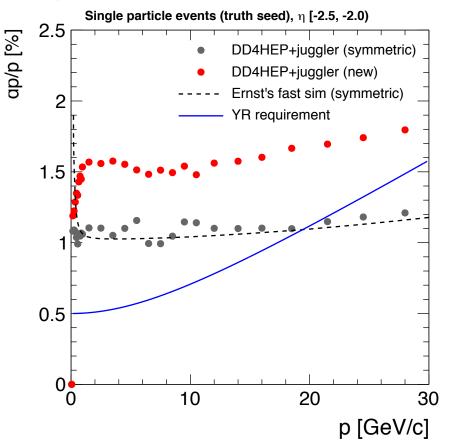


Unexpected difference in mid and forward rapidities

Due to B field map change?

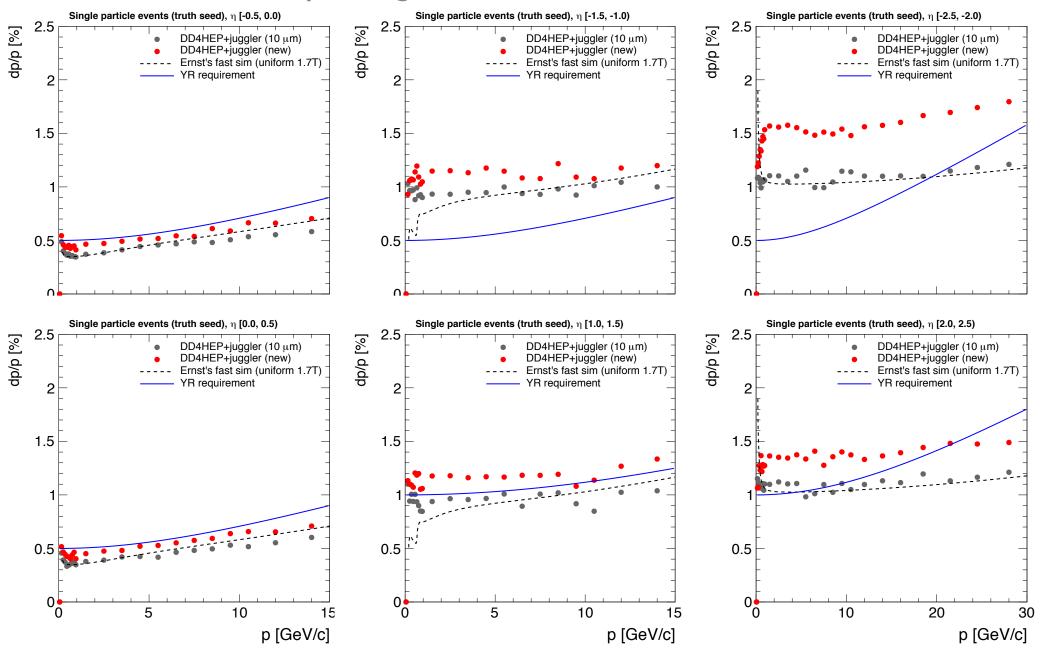


- p and DCA_z resolution show unexpected behavior towards low p at forward and backward rapidities
 - ◆ Expectation: increase of DCA₂ towards low p which is observed in fast simulation and Fun4All (GenFit used for track fitting)

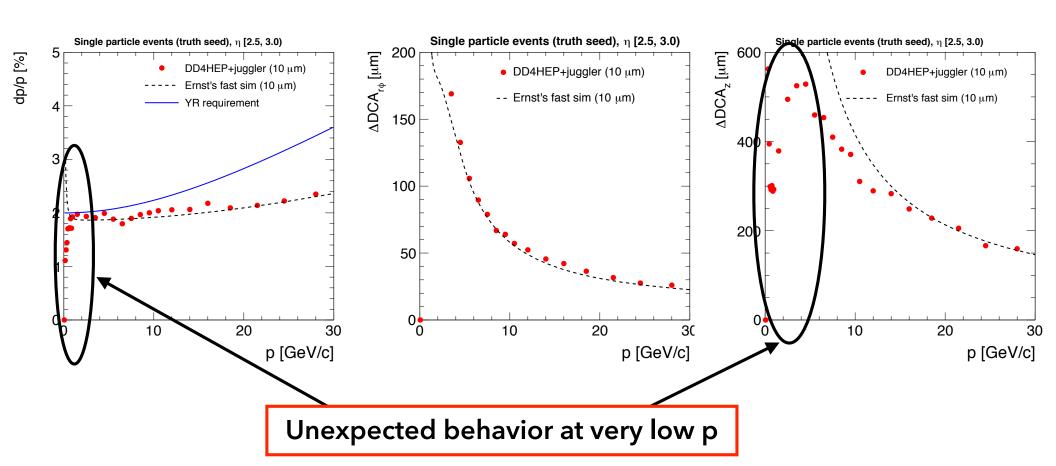



Previously on realistic seeding

- Realistic seeding code developed by Yue Shi available in DD4HEP/juggler (https:// indico.bnl.gov/event/16068/)
- Checked realistic seeding with ATHENA geometry (https://indico.bnl.gov/event/16583/)
 - Realistic seeding works well in midrapidityw/ "maxSeedsPerSpM = 1"
 - Low efficiency and problematic momentum reconstruction at low momentum (<10GeV) at forward rapidity


Code now improved by YueShi and tested with ePIC geometry

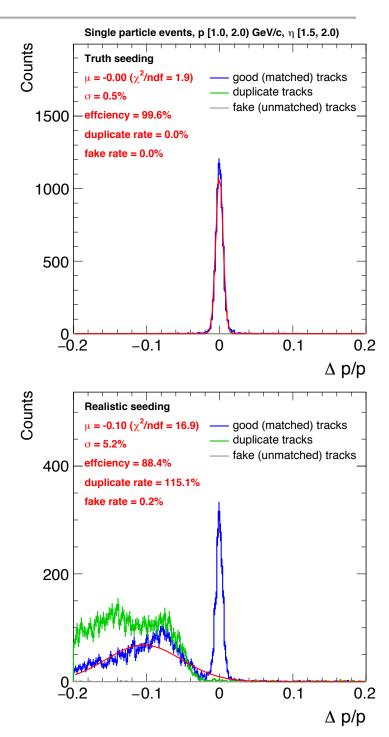


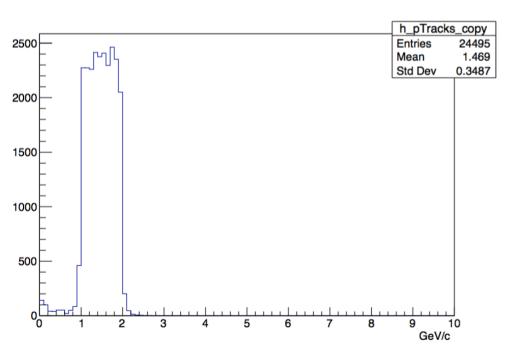

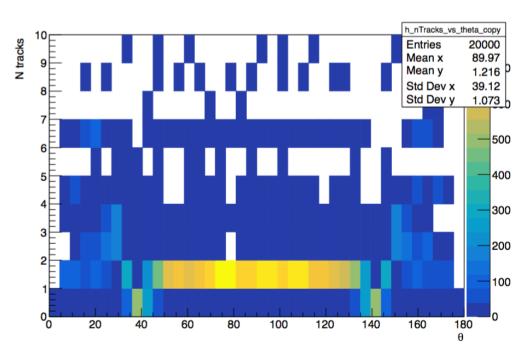



- Focus on the 1–2 GeV as the more challenging tracks
- "Ntrack = 0" is inefficiency, "Ntrack = 1" single reconstruction, "Ntrack \geq 2" multiple reconstruction
- Good efficiency except for the 40° region
- Some multiple reconstruction in the forwards

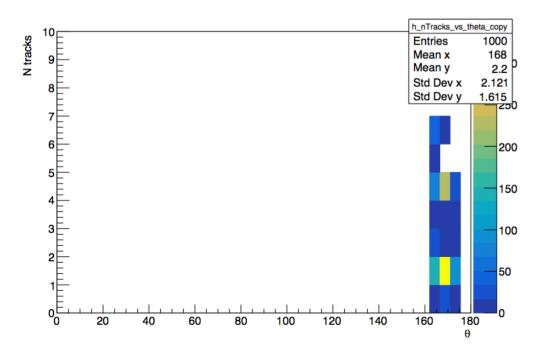

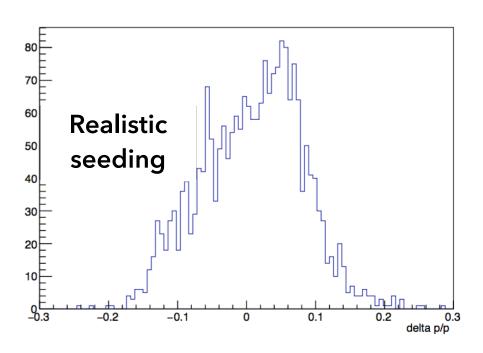


- Same 1-2 GeV tracks, $2 < \eta < 2.5$
- Reasonable performance, multiple reconstruction, some non-Gaussianess in the $\Delta p/p$

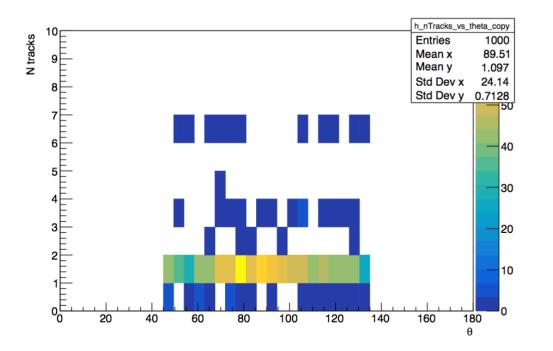

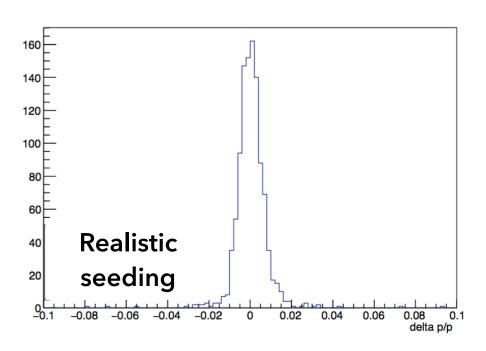

- Same 1-2 GeV tracks, $|\eta|$ < 0.88
- Excellent performance in the midrapidity

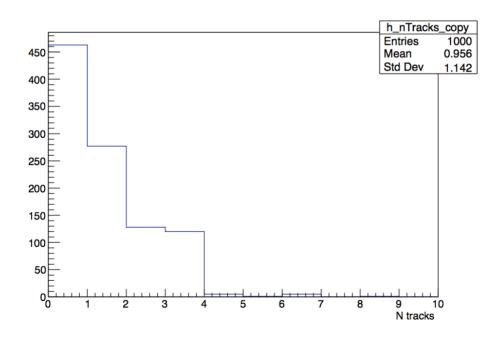

- 25–45°, the raw inefficiency is \approx 45% (shown as 1D histogram for clarity)
- Tracing through ACTS shows that only 16% is genuine, no seeds found type of inefficiency
- About 30% failed to generate initial track parameter due to coordinate transform (i.e. geometry) failure
- Only recently traced to this granularity inside ACTS, currently under investigation

- Status of track finding and performance
 - Track reconstruction with truth seeding perform mostly as expected in DD4HEP with the material map (for both symmetic and updated geometry)
 - YR achieved in mid and forward rapidities
 - * Missing information: more tracking information (χ^2 , # of associated hits), primary/secondary vertex reconstruction
- Status of realistic seeding
 - Significant improvement since last version for low momentum tracks at forward rapidity
 - Current issue: the low efficiency around 25-45 degree, under investigation now
 - Plan to test with DIS events and events with background after stable and reasonable performance achieved with single track events